



# Bebco Industries

4725 Lawndale LaMarque TX 77568  
(800) 652-3226 (409) 935-5743 Fax: (409) 938-4189

## PURGEABLE INSTRUMENT ACCESS DOOR APPLICATION DATA SHEET

CMED Technical Bulletin PIAD-ADS-R3 08/03

### Purpose

This document is provided to ensure the accuracy of the product you have inquired about. Please note the PIAD is a non-refundable custom item. To ensure total satisfaction, please complete this form and return via fax. See Technical Bulletin PIAD-R1.1 for more information. All orders subject to applicable terms and conditions of sale.

### CUSTOMER PROFILE


Company Name:	
Contact Name:	
Phone #:	Fax #:
E-Mail:	

### APPLICATION DATA

Window Dimensions: _____ (H) _____ (W) _____ (I.C.)	Height (H) & Width (W) must be $\geq$ area of protected device(s)
Overall Dimensions: _____ (X) _____ (Y)	Internal Clearance (I.C.) of 2" (50.8 mm) is Standard Depth
Measurements: <input type="checkbox"/> Standard (Inches) <input type="checkbox"/> Metric (Millimeters)	Add 5.50" (139.7 mm) to Height & Width to determine Overall Dimensions of PIAD
Model #: PIAD - - - - -	

### CONFIRM ALL DIMENSIONS ON DRAWING BELOW

Write "HINGE" as illustrated below along top, bottom, left or right side to indicate the desired location of the hinge on your PIAD

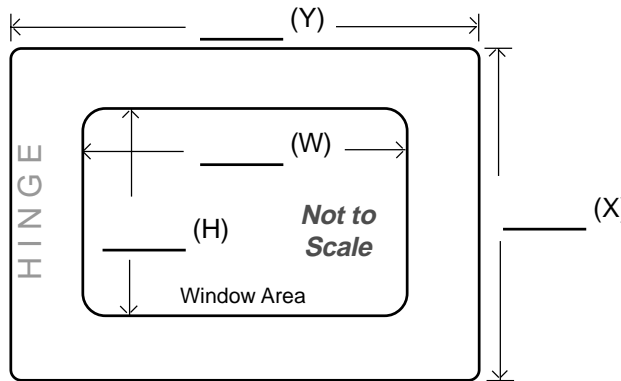

FRONT VIEW OF PIAD DOOR

### PURCHASE ORDER INFORMATION

P.O. Number:		
Quantity:	Issue Date:	Need By:
Other Material:	Custom Finish:	

Normal Availability: 21 working days - Contact Bebcos for expedited delivery

Customer Signature

By my signature above, I hereby authorize fabrication of products specified herein

BEBCO USE ONLY

SALES ORDER:	DATE:	SALESPERSON:
--------------	-------	--------------

### Model Number Designations

PIAD - A - CG - 1 - H - L

**Series Model Number**

**Window Size Range**

- A - 000 to 144 square inches
- B - 145 to 288 square inches
- C - 289 to 432 square inches
- D - 433 to 576 square inches
- E - 577 to 2304 square inches

**Body Material**

- C - 14 Gauge Carbon Steel
- A - 3/32" Thick 5052 Aluminum
- S - 14 Gauge 316 Stainless Steel
- O - Other - Please Specify Below

**Window Material**

- G - 1/4" Laminated Safety Glass
- L - 1/4" GE Marguard™ Lexan®

**Body Finish**

- 1 - 3 Mil. Flat Black Textured Enamel Paint
- 2 - Black Anodized (Aluminum only)
- 3 - Horizontal Brush (SS only)
- 4 - Vertical Brush (SS only)
- 5 - Custom Finish \* - Please Specify Below

**Door Fastening Hardware**

- H - Hand Operated Compression Latch
- K - Key Operated Compression Latch \*\*
- T - Tool Operated Compression Latch \*\*\*

**Hinge Position**

- L - Left Side
- R - Right Side
- T - Top Side
- B - Bottom Side

Prices for Sizes A-D are preestablished.

Prices for Size E quoted at time of inquiry.

\* Custom Finishes may include, but are not limited to epoxy or powder coating, passivation & clear anodize

\*\* Key Operated Compression Latch requires special key to operate (one (1) key supplied with each PIAD)

\*\*\* Tool Operated Compression Latch requires a 5/32" hex head tool to operate (not supplied with PIAD)

### PIAD Mounting Clearance

To accommodate the flanges and hinged door on Bebcos PIADs, please provide sufficient clearance on all sides of the protected device(s). Allowing for required free space as illustrated below will provide 1" of clearance on all flange sides and 2" of clearance on selected hinged side.

**NOTE: Additional clearance will be required on Selected Hinge Side, if Interior Clearance exceeds 2" Standard. Contact Bebcos for more information.**

